




25A-08-1/25A-32-2
Combination Wrenches, Inch




PRODUCT DETAILS

- Combination wrench in inch sizes
- Finish: Chrome-plated matt finish
- Material: High performance alloy steel
- Hardness: 42-50 HRC
- Standards: ISO 10102
- - 1 retail packaging, -2 industrial packaging

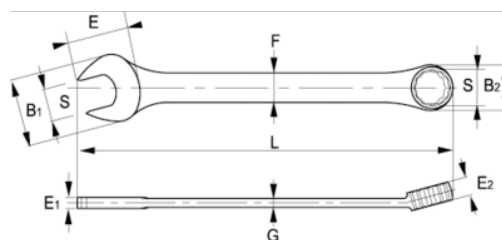

PRODUCT ATTRIBUTES

Product	S	L	B1	B2	F	E	E1	E2	G	
25A-08-2	1/4 in	103 mm	15.9 mm	10.6 mm	6.6 mm	7.9 mm	3.7 mm	5.2 mm	3 mm	15 g
25A-08-1	1/4 in	103 mm	15.9 mm	10.6 mm	6.6 mm	7.9 mm	3.7 mm	5.2 mm	3 mm	15 g
25A-10-1	5/16 in	119 mm	19 mm	13.6 mm	7.2 mm	9.9 mm	4 mm	6 mm	3.3 mm	21 g
25A-10-2	5/16 in	119 mm	19 mm	13.6 mm	7.2 mm	9.9 mm	4 mm	6 mm	3.3 mm	21 g
25A-12-2	3/8 in	124 mm	21.2 mm	15.1 mm	8.3 mm	10.4 mm	4 mm	6.8 mm	3.4 mm	26 g
25A-12-1	3/8 in	124 mm	21.2 mm	15.1 mm	8.3 mm	10.4 mm	4 mm	6.8 mm	3.4 mm	26 g
25A-14-2	7/16 in	143 mm	26 mm	17.1 mm	9.5 mm	12.6 mm	4.8 mm	7.5 mm	3.6 mm	39 g
25A-14-1	7/16 in	143 mm	26 mm	17.1 mm	9.5 mm	12.6 mm	4.8 mm	7.5 mm	3.6 mm	39 g
25A-16-1	1/2 in	164 mm	30 mm	20.2 mm	11.9 mm	14.6 mm	5.2 mm	8.3 mm	4.2 mm	63 g
25A-16-2	1/2 in	164 mm	30 mm	20.2 mm	11.9 mm	14.6 mm	5.2 mm	8.3 mm	4.2 mm	63 g
25A-18-1	9/16 in	174 mm	30 mm	21.2 mm	11.8 mm	15.8 mm	5.8 mm	8.9 mm	4.6 mm	68 g
25A-18-2	9/16 in	174 mm	30 mm	21.2 mm	11.8 mm	15.8 mm	5.8 mm	8.9 mm	4.6 mm	68 g
25A-20-2	5/8 in	194 mm	35.3 mm	23.8 mm	13.6 mm	17.6 mm	6.3 mm	9.5 mm	5 mm	107 g
25A-20-1	5/8 in	194 mm	35.3 mm	23.8 mm	13.6 mm	17.6 mm	6.3 mm	9.5 mm	5 mm	107 g
25A-22-2	11/16 in	214 mm	39.4 mm	26.8 mm	14.8 mm	20.5 mm	6.7 mm	10.5 mm	5.2 mm	137 g
25A-22-1	11/16 in	214 mm	39.4 mm	26.8 mm	14.8 mm	20.5 mm	6.7 mm	10.5 mm	5.2 mm	137 g
25A-24-2	3/4 in	228 mm	41.6 mm	28.3 mm	16.2 mm	21.1 mm	7 mm	11.2 mm	5.2 mm	163 g
25A-24-1	3/4 in	228 mm	41.6 mm	28.3 mm	16.2 mm	21.1 mm	7 mm	11.2 mm	5.2 mm	163 g
25A-26-2	13/16 in	249.5 mm	45.4 mm	32.4 mm	17.3 mm	22.8 mm	8.6 mm	12.6 mm	6 mm	210 g
25A-26-1	13/16 in	249.5 mm	45.4 mm	32.4 mm	17.3 mm	22.8 mm	8.6 mm	12.6 mm	6 mm	210 g
25A-28-2	7/8 in	249.5 mm	45.4 mm	32.4 mm	17.3 mm	22.8 mm	8.6 mm	12.6 mm	6 mm	210 g
25A-28-1	7/8 in	249.5 mm	45.4 mm	32.4 mm	17.3 mm	22.8 mm	8.6 mm	12.6 mm	6 mm	210 g
25A-30-1	15/16 in	270 mm	49.7 mm	36.1 mm	20.3 mm	25 mm	9.2 mm	13.6 mm	6.4 mm	281 g
25A-30-2	15/16 in	270 mm	49.7 mm	36.1 mm	20.3 mm	25 mm	9.2 mm	13.6 mm	6.4 mm	281 g
25A-32-2	1 in	289.5 mm	53.4 mm	39.6 mm	22.5 mm	27.6 mm	9.6 mm	14.2 mm	6.8 mm	346 g
25A-32-1	1 in	289.5 mm	53.4 mm	39.6 mm	22.5 mm	27.6 mm	9.6 mm	14.2 mm	6.8 mm	346 g
25A-34-1	1.1/16 in	310 mm	58.4 mm	41.6 mm	23.3 mm	29.5 mm	10 mm	14.6 mm	7.2 mm	382 g
25A-36-1	1.1/8 in	330 mm	60.4 mm	45.6 mm	23.3 mm	32.1 mm	10.6 mm	15.6 mm	7.6 mm	476 g
25A-40-1	1.1/4 in	349 mm	67.4 mm	48.8 mm	25.3 mm	35.6 mm	11.2 mm	17.8 mm	8 mm	567 g
25A-44-1	1.3/8 in	350 mm	67.4 mm	48.8 mm	25.3 mm	35.6 mm	11.2 mm	17.8 mm	8 mm	541 g
25A-46-1	1.7/16 in	401 mm	74 mm	54 mm	31 mm	62 mm	10.4 mm	17 mm	8 mm	787 g
25A-48-1	1.1/2 in	401 mm	74 mm	54 mm	31 mm	62 mm	10.4 mm	17 mm	8 mm	787 g
25A-52-1	1.5/8 in	435 mm	80 mm	61 mm	34 mm	70 mm	11.5 mm	19.5 mm	8 mm	1050 g
25A-58-1	1.13/16 in	555 mm	91 mm	66 mm	34 mm	79.8 mm	15 mm	23 mm	11 mm	1850 g
25A-64-1	2 in	602 mm	100 mm	73 mm	36.6 mm	86.7 mm	17 mm	26 mm	12 mm	2215 g